

No one does it
like you

Canon

OUTSTANDING PRINT QUALITY

The imageRUNNER ADVANCE C7500i III Series devices are powerful, versatile and perfectly suited to high volume environments where quality finishes are paramount.

imageRUNNER ADVANCE C7500i III Production Series

- Outstanding print quality with V2 colour and 2,400 dpi
- Finish with a range of production options
- Print paper weight up to 300 gsm
- Track, report and control usage
- Media handling thin, thick and textured stock



MOBILITY

Connect on-the-go

- Communicate remotely through WiFi, Bluetooth* and NFC*
- Give your team flexibility so projects don't need to stop just because they are away from the office
- Intuitive printing and scanning using Canon PRINT Business plus built in support for Apple® AirPrint®, Mopria™ and Google Cloud™

*Optional



SECURITY

Protect sensitive information with enhanced security capabilities

- Advanced control over document access ensures documents are only seen by those that are authorised
- Integrates with existing, third-party Security Information and Event Management (SIEM) systems to help provide real-time comprehensive insights into potential threats to the network and printers
- Technology to verify that the device boot process, firmware, and applications initialize without alterations or tampering time and money spent on various projects



COST CONTROL

Advanced functions for big cost-saving

- Save your business money by reducing your paper wastage utilising settings such as forced job hold at the device, and blank page removal
- Enable print policies to monitor output while also restricting users from overuse
- Save even further with remote support to help diagnose and solve issues fast, rather than taking up the valuable time of in-house IT staff



Designed for a simple, tailored experience

- The large interface allows for easy navigation while My ADVANCE provides a personalised experience so you can customise your workflow in a way that works best for you
- Speed up processes with the single-pass document feeder and automatic blank page removal
- Achieve outstanding results with V2 imaging technology (V2 colour and true 2400dpi) and a range of finishing options including stapling, booklet, staple on-demand and eco staple

Systems seamlessly converge for smooth operation and easy handling

- Canon's MEAP platform works to integrate both new and existing document, capture and output management systems while being partnered with relevant support technology
- Collaborate with key line of business applications and external systems
- For smooth, hassle-free projects, scan and convert to Microsoft® Word and PowerPoint® files
- Supports integration with popular cloud services like Google Drive and Box*

Environmentally conscious technology works to achieve green initiatives for your business

- The iR-ADV C7500i III runs efficiently to help eliminate unnecessary power consumption and is designed to reduce emissions
- Motion sensors, sleep recovery triggers, 100% recycled plastics, and remote shutdown are all features that contribute to ongoing sustainability
- Minimise paper wastage with default print settings including double-sided print and black and white
- ENERGY STAR® and Blue Angel qualified with class leading Typical Electricity Consumption (TEC) rating

* Requires uniFLOW Online Express or uniFLOW Online subscription

CONFIGURATION

Staple Finisher


- 3-Tray, 4,250-sheet capacity (A4, B5, A5R)
- Corner and double stapling up to 100 sheets (A4/B5, 80 gsm), 50 sheets (A3/ B4/A4R, 80 gsm)
- Supports optional internal 2/3 and 2/4 hole inner punchers



Upright Control Panel




Utility Tray



Copy Tray

Booklet Finisher

- 3-Tray, 4,250-sheet capacity (A4, B5, A5R)
- Corner and double stapling up to 100 sheets (A4/B5, 80 gsm), 50 sheets (A3/B4/A4R, 80 gsm)
- Booklet-making up to 20 sheets and non-staple saddle folded capacity up to 5 sheets
- Supports optional internal 2/3 and 2/4 hole inner punchers

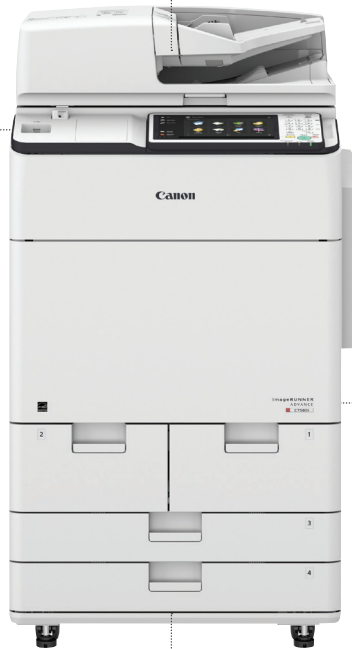

Multi-Drawer Paper Deck

- Supports A3, B4, A4, A4R, B5R, B5, A5R, SRA3, 13" x 19"
- Media Weight 52 – 300 gsm
- 2,000 sheets x 3 drawers, total 6,000 sheets (80 gsm)

Document Insertion Unit

- Insert preprinted sheets
- Up to SRA3
- Two trays
- 400-sheet total capacity



Paper Folding Unit

- Z-fold, C-fold, Half Fold, Accordion Z-fold, Double Parallel Fold



Multi Function Professional Puncher

- Supports various die sets
- Up to 300 gsm
- Supports SRA3, A3, A4, A4R
- 70,000 chip tray capacity
- Enhanced die durability



colorPASS-GX500

- PS3/PCL6
- 4GB/1TB
- Fiery FS200 Pro



imagePASS-N2

- PS3/PCL6
- 2GB/500GB
- Fiery FS200



imageRUNNER ADVANCE C7500i III Production Series SPECIFICATIONS



Main Unit	
Type	A3 Colour Laser Multifunctional
Core Function	Print, Copy, Scan, Send, Store and Optional Fax
Processor	Canon Dual Custom Processor (Shared)
Control Panel	Standard: 25.6 cm (10.1 inch) TFT LCD WSVGA Colour Touchpanel Optional: 26.4 cm (10.4 inch) TFT LCD SVGA Colour Uprightpanel
Memory	Standard: 4GB RAM
Hard Disk Drive	Standard: 250 GB Maximum: 1 TB
Mirroring Hard Disk Drive	Optional: 250 GB, 1 TB
Interface Connection	Network: Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n) Optional: NFC, Bluetooth Others: Standard: USB 2.0 x2 (Host), USB 3.0 x1 (Host), USB 2.0 x1 (Device) Optional: Serial Interface, Copy Control Interface
Paper Supply Capacity (A4, 80 gsm)	Standard: 3,550 sheets 1,100-sheet Paper Deck x 2, 550-sheet Paper Cassette x 2, 250-sheet Multi-purpose tray; Maximum: 9,300 sheets (with Multi-Drawer Paper Deck-C1)
Paper Sources (80 gsm)	Standard: Two 1,100-sheet Paper Deck, Two 550-sheet Paper Cassettes 250-sheet Multi-Purpose Tray Optional: 6,000-sheet Paper deck (Multi-Drawer Paper Deck-C1) Maximum: 9,300 Sheets (With Multi-Drawer Paper Deck-C1)
Paper Output Capacity (A4, 80 gsm)	Standard: 250 Sheets (with Copy Tray-R2) Maximum: 4,250 Sheets (with Staple Finisher-X1 or Booklet Finisher-X1)
Finishing Capabilities	Standard: Collate, Group With External Finisher: Collate, Group, Offset, Staple, Saddle Stitch*, Hole Punch** (multiple patterns), Staple-Free Staple***, Staple on Demand***, Document Insertion***, Fold (C-/Z-*/Half*/Double parallel*/Accordion-Z fold*), Trimming** *Requires Booklet Finisher-V2 or Booklet Finisher-X1 **Requires 2/3 Hole Puncher Unit-A1 or 2/4 Hole Puncher Unit-A1 (with Staple Finisher-V2 or Booklet Finisher-V2), Puncher Unit-BF1 or Puncher Unit-BG1 or Multi Function Professional Puncher-A1/B1 (with Staple Finisher-X1 or Booklet Finisher-X1) ***Requires Staple Finisher-V2 or Booklet Finisher-V2 ****Requires Document Insertion Unit-Q1 or Document Insertion/Folding Unit-K1 (with Staple Finisher-V2 or Booklet Finisher-V2) or Document Insertion Unit-N1 (with Staple Finisher-X1 or Booklet Finisher-X1) *****Requires Document Insertion/Folding Unit-J1 (with Staple Finisher-V2 or Booklet Finisher-V2) or Paper Folding Unit-J1 (with Staple Finisher-X1 or Booklet Finisher-X1) *****Requires Paper Folding Unit-J1 (with Staple Finisher-X1 or Booklet Finisher-X1) *****Requires Inner Booklet Trimmer-A1 (with Booklet Finisher-X1)
Supported Media Types	Upper Left/Right Cassettes (1/2): Thin paper, Plain paper, Thick paper, Colour paper, Recycled paper, Pre-punched paper, Transparency, Bond paper, Letterhead Lower Paper Cassettes (3/4): Thin, Plain, Recycled, Thick, Colour, Tab*, Transparency, Bond, Pre-punched, Letterhead, Envelope *Requires Tab Feeding Attachment-F1 Multi-Purpose Tray: Thin paper, Plain paper, Thick paper, Colour paper, Recycled paper, Pre-punched paper, Textured paper, Transparency, Tracing paper, Label, Tab paper, Bond paper, Coated paper, Envelope, Letterhead Multi-Drawer Paper Deck-C1: Thin paper, Plain paper, Thick paper, Colour paper, Recycled paper, Pre-punched paper, Textured paper, Transparency, Label, Tab paper, Bond paper, Coated paper, Letterhead
Supported Media Sizes	Upper Left/Right Deck (1/2): Standard Size: A4, B5 Lower Cassettes (3/4): Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Envelope (No.10 (COM10), Monarch, ISO-C5, DL) Envelope custom size: 98.0 x 148.0 mm to 330.2 x 487.7 mm Custom Size: 139.7 x 182.0 mm to 330.2 x 487.7 mm Multi-Purpose Tray: Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Envelopes (No.10 (COM10), Monarch, ISO-C5, DL) Envelope custom size: 90.0 x 148.0 mm to 330.2 x 487.7 mm Custom size: 100.0 x 148.0 mm to 330.2 x 487.7 mm Free size: 100.0 x 182.0 mm to 330.2 x 487.7 mm Multi-Drawer Paper Deck-C1: Standard Size: A3, B4, A4, A4R, B5R, B5, A5R, SRA3, 13"x19" (330mm x 483 mm), Custom Size: 139.7 mm x 182 mm to 330.2 mm x 487.7 mm
Supported Media Weights	Upper Cassettes: 52 to 220 gsm Lower Cassettes: 52 to 256 gsm Multi-Purpose Tray: 52 to 300 gsm Duplex: 52 to 220 gsm
Warm-up Time	From Power On: 30 Seconds or Less (Time between device power-on and when the start key is enabled (print reservation)) From Deep Sleep Mode: 30 Seconds or Less Quick Startup Mode: 4 seconds or less* *Time from device power-on to when key operations can be performed on the touch panel display.
Dimensions (W x D x H)	689 mm x 941 mm x 1,220 mm
Installation Space (W x D)	Basic-1,175 x 1,524 mm (with Front door open + Multi-purpose tray/upper-right cover open + Left cover open) Fully Configured: 3,818 x 1,524 mm [with Multi-Drawer Paper Deck-C1 + Buffer Pass-M1 + Document Insertion Unit-N1 + Multi Function Professional Puncher-A1 + Paper Folding Unit-J1 + Booklet Finisher-X1 (with the extension tray extended)]
Weight*	Approx. 272 kg *Including the toner

Print Specifications	
Printing Method	Colour laser beam printing
Print Speed** (ppm, BW/CL)	IR-ADV C7580i III Up to 80/70 ppm (A4, A5, A5R, A6R), Up to 40/35 ppm (A3), Up to 56/49 ppm (A4R) IR-ADV C7570i III Up to 70/65 ppm (A4, A5, A5R, A6R), Up to 35/32 ppm (A3), Up to 49/46 ppm (A4R), IR-ADV C7565i III Up to 65/60 ppm (A4, A5, A5R, A6R), Up to 32/30 ppm (A3), Up to 46/42 ppm (A4R)
(*simplex)	
Print Resolution (dpi)	2400 x 2400* *Laser Resolution
Page Description Languages	Standard: UFR III, PCL6 Option: Adobe PS 3
Double Sided Printing	Automatic (Standard)
Direct Print	Direct printing available from USB memory key, Advanced box, Remote UI and Web Access (Only PDF print from websites is supported) Supported File Types: PDF, TIFF, JPEG, EPS, XPS
Printing from mobile and cloud	A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information
Fonts	PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andale Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts** PS fonts: 136 Roman *Requires optional PCL International Font Set-A1 **Requires optional Barcode Printing Kit-D1

Print Features	Suspend Job Timeout, Subset Finishing (PS only), Profile Settings, Secured Print, Watermark, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/ Orientations, Offsetting, Front/Back Covers, Toner Reduction, Poster Printing, Forced Hold Printing
Operating System	UFRII: Windows 7 / 8.1 / 10 / Server 2008 / Server 2008 R2 / Server 2012 / Server 2012 R2 / Server 2016, MAC OS X (10.9 or later) PCL: Windows 7 / 8.1 / 10 / Server 2008 / Server 2008 R2 / Server 2012 / Server 2012 R2 / Server 2016 PS: Windows 7 / 8.1 / 10 / Server 2008 / Server 2008 R2 / Server 2012 / Server 2012 R2 / Server 2016, MAC OS X (10.9 or later) PPD: MAC OS X (10.3.9 or later), Windows 7 / 8.1 / 10

Copy Specifications	
Copy Speed* (ppm, BW/Colour)	IR-ADV C7580i III: Up to 80/70 ppm (A4, A5, A5R, A6R), Up to 40/35 ppm (A3), Up to 56/49 ppm (A4R) IR-ADV C7570i III: Up to 70/65 ppm (A4, A5, A5R, A6R), Up to 35/32 ppm (A3), Up to 49/46 ppm (A4R) IR-ADV C7565i III: Up to 65/60 ppm (A4, A5, A5R, A6R), Up to 32/30 ppm (A3), Up to 46/42 ppm (A4R)
(*simplex)	
*First-Copy-Out Time (A4, BW/L)	IR-ADV C7580i III: Approx. 4.4 seconds or less (BW), Approx. 5.4 seconds or less (CL) IR-ADV C7570i III: Approx. 4.8 seconds or less (BW), Approx. 5.9 seconds or less (CL) IR-ADV C7565i III: Approx. 4.8 seconds or less (BW), Approx. 5.9 seconds or less (CL) *20°C to 30°C Environment
Copy Resolution (dpi)	600 x 600
Multiple Copies	Up to 9,999 copies
Copy Density	Automatic or Manual (9 Levels)
Magnification	25% - 400% (1% Increments)
Preset Reductions	25%, 50%, 61%, 70%, 81%, 86%
Preset Enlargements	115%, 122%, 141%, 200%, 400%
Basic Copy Features	Preset Reduction/Enlargement Ratios by Area, Paper Setting, Previous Settings, Favorite Settings, Finishing, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Setting Confirmation/Cancel
Special Copy Features	Book to Two Pages, Two-sided Original, Finishing, Booklet, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Density Adjustment, Original Type Selection, Transparency Cover Sheets, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Shift, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Job Done Notice, Mirror Image, Print on Tab, Store in Mail Box, Superimpose Image, Copy ID Card, Detect Feeder Multi Sheet Feed, Free Size Original, Colour Balance, Adjust One-Touch Colour, Area Designation

Scan Specifications	
Type	Colour Platen and Single-pass Duplexing Automatic Document Feeder* [2-sided to 2-sided (Automatic)] *Detect Feeder Multi Sheet Feed is supported
Document Feeder Paper Capacity	300 Sheets
Supported Media sizes	Platen: max. scanning size: 297.0 x 431.8 mm Document Feeder media size: A3, A4, A4R, A5, A5R, B4, B5, B5R, B6R, Custom size: 128.0 x 193.7 mm to 304.8 x 431.8 mm
Custom size	128.0 x 193.7 mm to 304.8 x 431.8 mm
Document Feeder Supported Media Weights	Single-sided scanning: 38 to 220 gsm (BW) Single-sided scanning: 64 to 220 gsm (CL) Double-sided scanning: 50 to 220 gsm (BW) Double-sided scanning: 64 to 220 gsm (CL)
Pull Scan Spec	Colour Network ScanGear2, For both Twain and WIA Supported OS: Windows 7/8/8.1/10 Server 2008/Server 2008 R2/Server 2012/Server 2012 R2
Scan Resolution (dpi)	600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100, 150 x 150, 100 x 100
Platen Acceptable Originals	Platen: Sheet, Book, 3-Dimensional Objects [Height: Up to 50 mm, Weight: up to 2 kg] Feeder Size: A3, B4, A4R, A4, B5R, B5, A5R, A5, B6R
Scan Speed (ppm BW/CL; A4)	1-sided Scanning: 120 /120 (300 dpi), 120 /70 (600 dpi) 2-sided Scanning: 240 /220 (300 dpi), 150 /90 (600 dpi)
Double Sided Scanning	2-sided to 2-sided (Automatic)
Scan Method	Send functionality available on all models Scan to USB Memory: Available on all models Scan to Mobile Devices and cloud-based services: A range of solutions is available to provide scanning to mobile devices or cloud-based services depending on your requirements. Please contact your sales representative for further information. TWIN/WIA Pull scanning available on all models

Send Specifications	
Optional/Standard	Standard on all models
Destination	E-mail/Internet Fax (SMTP), SMB, FTP, WebDAV, Mail Box, Super G3 Fax (Optional), IP Fax (Optional)
Colour Mode	Automatic-Colour Select (Full Colour/Grayscale), Automatic-Colour Select (Full Colour/Black-and-White), Full Colour, Grayscale, and Black and White
Address Book	LDAF (2,000)/Local (1,600)/Speed dial (200)
Send Resolution (dpi)	600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100, 150 x 150, 100 x 100
Communication Protocol	File: FTP (TCP/IP), SMB v3.0, WebDAV E-mail/Fax: SMTP, POP3
File Format	Standard: TIFF, JPEG, PDF (Limited Colour, Compact, Apply policy, Optimize for Web, PDF A/1-b, Encrypted, Device Signature), XPS (Compact, Device Signature) Optional: PDF (Trace&Smooth, Searchable, User Signature), XPS (Searchable, User Signature), Office Open XML (PowerPoint, Word)
Universal Send Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's Name (TTI), Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages, Detect Feeder Multi Sheet Feed

Fax Specifications	
Optional/Standard	Optional on all models
Maximum Number of Connection Lines	4
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps
Compression Method	MH, MR, MMR, JBIG
Resolution	400 x 400, 200 x 400, 200 x 200, 200 x 100
Sending/Recording Size	A3, A4, A4R, A5**, A5R**, B4, B5**, B5R** ** Sent as A4 * Sent as B4
Fax Memory	Up to 30,000 pages
Speed Dials	Max. 200
Group Dials/Destinations	Max. 199 dials

Sequential Broadcast	Max. 256 addresses
Memory Backup	Yes
Fax Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density (for Scanning), Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's Name (TT), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Detect Feeder Multi Sheet Feed

Store Specifications

Mail Box (Number supported)	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes, 30,000 Maximum Pages Stored
Advanced Box	Communication Protocol: SMB or WebDAV Supported Client PC: Windows (Windows Vista/7/8/10) Concurrent Connections (Max.): SMB: 64, WebDAV: 3 (Active Sessions)
Advanced Box Available Disc Space	Approx. 16GB (Standard HDD) Approx. 480GB (1TB HDD)
Advanced Box Features	Authentication for Advanced Box Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support
Memory Media	Standard: USB Memory

Security Specifications

Authentication	Standard: Universal Login Manager, User Authentication, Department ID Authentication, Access Management System, Device and Function Level Log-in, uniFLOW Online Express Optional: uniFLOW, uniFLOW Online
Data	Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption (FIPS140-2 Validated) Optional: Hard Disk Drive Mirroring, Hard Disk Drive removal, IEEE 2600.2 Common Criteria Certification, Data Loss Prevention (Requires uniFLOW)
Network	Standard: IP/Mac Address Filtering, IPSEC, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME
Document	Standard: Secure Print, Adobe LiveCycle® Rights Management ES2.5 Integration Optional: Encrypted PDF, Encrypted Secure Print, User and Device signatures, Secure Watermarks, Document Scan lock

Environmental Specifications

Operating Environment	Temperature: 10 to 30°C Humidity: 20 to 80 % RH (relative Humidity)
Power Requirements	IR-ADV C7565i III: 220-240 V (±10%), 50/60 Hz (±2 Hz), 10 Amp IR-ADV C7570i III: 220-240 V (±10%), 50/60 Hz (±2 Hz), 10 Amp IR-ADV C7580i III: 220-240 V (±10%), 50/60 Hz (±2 Hz), 15 Amp
Power Consumption	Maximum: IR-ADV C7580i III: 2,500 W, IR-ADV C7570i III/C7565i III: 2,000 W Standby: Approx. 136.6 W *1 Sleep mode: Approx. 0.9 W *2 *1 Reference Value (measured only one unit) *2 0.9W sleep mode is not available in all circumstances due to certain settings.

Consumables

Toner	NPG-72 TONER BK/C/M/Y
Toner (Estimated Yield @ 5% Coverage)	NPG-72 TONER BK: 82,000 pages NPG-72 TONER C/M/Y: 66,500 pages

Software and Printer Management

Tracking and Reporting	Universal Login Manager (ULM): Manage your costs easily by using the embedded reporting capability to identify and control costs on a user-based level by device. uniFLOW Online Express: Combining with ULM you can gain further control and highlight expenditures per users/department and pinpoint where costs can be scaled down from a central cloud based location.
Remote Management Tools	iW Management Console: Server-based software for centralised management of a fleet of devices (includes monitoring or consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware and MEAP applications, meter capture and reporting, driver and resource management) eMaintenance: Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance) Content Delivery System: Allows the Remote distribution of firmware, IR options and MEAP applications; Remote User Interface (RUI) Web-based interface to each device that helps to provide remote device management and control.
Scanning Software	Network ScanGear: TWAIN-compliant scanner driver that enables computers on a network to use the pull scan functionality of the device.
Optimisation Tools	Canon Driver Configuration Tool: A utility for changing the factory default settings of Canon print drivers NetSpot Device Installer: Simple utility software that allows you to make network protocol settings for Canon devices connected to your network.
Platform	MEAP (Multifunctional Embedded Application Platform): A powerful JAVA Embedded Platform for Canon devices which provides tight coupling between a range of software solutions and the device. MEAP Web: Web service alternative to MEAP that allows MFP applications to be developed and deployed via web services
Document Publishing	iW Desktop: Powerful print publishing software which easily combines documents from different sources and file formats, applies finishing with preview and templates to create professional looking documents. Includes PDF creation, annotation and compression capabilities for simple digital workflows such as proofing and authorisation.

Fiery Print Controller Specifications

Optional/Standard	Optional on all models
Name	imagePASS-N2 (Embedded)
Print Resolution (dpi)	1200 x 1200 600 x 600
Standard Page Description Languages	Adobe PS3, PCL6
Memory	4 GB (1 x 4GB)
Hard Disk Drive	500 GB SATA
Processor	Intel Pentium G4400 (3.3GHz)
System	Fiery FS350
Fonts	PS: 138 Fonts PCL: 113 Fonts
Supported Operating Systems	Windows 7 32 and 64 bit / Windows 8.1 32 and 64 bit / Windows 10 32 and 64 bit / Windows Server 2012 64 bit only / Windows Server 2012 R2 64bit only / Windows Server 2016 R2 64bit only / MAC OS 10.11, 10.12, 10.13, 10.14
Interface	2 x Ethernet (1000Base-T/1000Base-TX/10Base-T), USB3.0 x 2 (Rear x 2), USB2.0 x 4 (Rear x 4)
Network Protocols	TCP/IP (FTP, SMTP, POP, HTTP, SNMP, LDAP, SLP, SMB, LPD, IPP, WS-Discovery, Bonjour, Direct Mobile Printing, Port9100, SNT, 802.1X, DHCP, DNS, NTP)
Direct Print	PDF1.7, EPS, TIFF6, JDF1.4/JMFOP)
VDP	FreeForm V1, 2.1
Fiery Print Controller Standard Features	Fiery Command WorkStation6 / Paper Catalog / Fiery Spot-On / Fiery Remote Scan / Fiery Hot Folders & Virtual Printers
Fiery Print Controller Options	Fiery Impose / Fiery Compose / Fiery Impose and Compose / Productivity Package Web Activate (Include Fiery JDF)
HW Platform	E400
Base OS	Debian of Linux
Maximum Power Consumption	47 W
Weight	4.95 kg
Dimensions (W x D x H)	285 x 93 x 295 mm

Paper Supply Options

Name	Multi-Drawer Paper Deck-C1
Paper Capacity	2,000 sheets x 3 drawers, total 6,000 sheets (80 gsm)

Paper Types	Thin, Plain, Recycled, Colour, Thick, Pre-punched, Label, Letterhead, Bond, Coated, Transparency, Tab, Textured
Paper Size	SRA3, A3, A4, A4R, A5R, B4, B5, B5R
Custom Size	139.7 x 182.0 mm to 330.2 to 487.7 mm
Paper Weight	52 to 300 gsm
Power Source	220-240 V/1.7A 50/60Hz
Dimensions (W x D x H)	950 x 797 x 1,040 mm
Weight	Approx. 155 kg

Output Options

Name	Copy Tray-R2
Capacity	(Provides a simple tray for basic output needs.) 250/100 sheets (1-sided/2-sided, 80 gsm)
Name	Staple Finisher-X1 (External)
Number of Trays	3
Upper Tray Capacity*	A4, A5R, B5: 1,500 sheets, SRA3, A3, A4R, A5, B4, B5R: 750 sheets, A6R: 250 sheets
Mid Tray Capacity*	A4, A5R, B5: 250 sheets, A3, A4R, A5, A6R, B4, B5R: 125 sheets
Lower Tray Capacity*	[Cascade-Load mode] A4, B5 2,500 sheets, [Random-Load mode] A4, A5R, B5: 1,500 sheets, SRA3, A3, A4R, A5, B4, B5R: 750 sheets, A6S: 250 sheets *with 81.4 gsm paper

Paper Weight	Upper Tray: 52 to 300 gsm Mid Tray: 52 to 300 gsm Lower Tray: 52 to 300 gsm
Staple Position	Corner, Double
Staple Capacity	Corner and Double Stapling: A4/B5: 100 sheets (52 to 80 gsm) A3/B4/A4R: 50 sheets (52 to 80 gsm)
Dimensions (W x D x H)	782 x 765 x 1,040 mm (when the extension tray is extended)
Weight	Approx. 64 kg

Name	Staple Finisher-V2 (External)
Number of Trays	3
Top Tray Capacity*	A4, A5, A5R, A6R, B5: 250 sheets, A3, A4R, B4, B5R: 125 sheets
Mid Tray Capacity	A4, A5, A5R, A6R, B5: 250 sheets, A3, A4R, B4, B5R: 125 sheets
Lower Tray Capacity	A4, A5, A5R, B5: 3,000 sheets SRA3, A3, A4R, B4, B5R: 1,500 sheets, A6R: 250 sheets * with 81.4 gsm paper

Paper Weight	Upper Tray 52 to 256 gsm Mid Tray 52 to 256 gsm Lower Tray 52 to 300 gsm
Staple Position	Corner, Double
Staple Capacity	Corner and Double Stapling: A4, B5: 65 sheets (52 to 90 gsm) A3, A4R, B4: 30 sheets (52 to 90 gsm)

Staple-Free Staple:	A3, A4: 5 sheets (52 to 64 gsm) 4 sheets (65 to 81.4 gsm) 3 sheets (81.5 to 105 gsm)
Staple on Demand	65 sheets (90 gsm)
Dimensions (W x D x H)	656 x 623 x 1,195 mm (when the extension tray and rotary tray are extended)
Weight	Approx. 35 kg

Name	Booklet Finisher-V2 (External) (Includes the above Staple Finisher-V2 basic staple specifications.)
Booklet Stitch paper size	A3, A4R, B4, Custom Size (195.0 x 270.0 mm to 304.8 x 457.2 mm)
Booklet Stitch Staple Capacity	20 sheets x 10 sets (52 to 81.4 gsm) (including 1 cover sheet up to 256 gsm)
Non Staple Folded Capacity	up to 3 sheets (52 to 105 gsm)
Dimensions (W x D x H)	656 x 623 x 1,195 mm (when the extension tray and rotary tray are extended)
Weight	Approx. 58 kg

Name	2/3 HOLE PUNCHER UNIT-A1 (Requires either the Staple Finisher-V2 or Booklet Finisher-V2) Two or Three Holes
Acceptable Punch Paper Weight	52 to 300 gsm
Acceptable Punch Paper Size	Two holes: A3, A4, A4R, A5, B4, B5, B5R, Three holes: A3, A4, B4, B5
Power Source	From the Main Unit

Name	2/4 Hole Puncher Unit-A1 (Requires either the Staple Finisher-V2 or Booklet Finisher-V2) Two or Four Holes
Acceptable Punch Paper Weight	52 to 300 gsm
Acceptable Punch Paper Size	Two holes: A3, A4, A4R, A5, B4, B5, B5R Four holes: A3, A4
Power Source	From the Main Unit

Name	Booklet Finisher-X1 (External) (Includes the above Staple Finisher-X1 basic staple specifications.)
Booklet Stitch paper size	SRA3, A3, A4R, B4, Custom Size (210.0 x 279.4 mm to 330.2 x 487.7 mm)
Booklet Stitch Staple Capacity	20 sheets x 5 sets (60 to 81.4 gsm) (including 1 cover sheet up to 300 gsm)
Non Staple Folded Bunch Capacity	up to 5 sheets (60 to 105 gsm)
Power Source	100-240 V, 50/60Hz, 2.8 A
Dimensions (W x D x H)	896 x 765 x 1,040 mm (when the extension tray is extended)
Weight	Approx. 110 kg

Name	Inner Booklet Trimmer-A1 (Requires the Booklet Finisher-X1)
Waste Tray Capacity	1,500 Sheets
Acceptable Paper Weight	60 to 300 gsm
Trim Amount	2 to 20 mm
Acceptable Paper Size	210.0 x 279.4 mm to 330.2 x 487.7 mm
Power Source	From the Finisher

Name	Puncher Unit-BF1 (Requires either the Staple Finisher-X1 or Booklet Finisher-X1) Two to Three Holes
Acceptable Punch Paper Weight	52 to 256 gsm
Acceptable Punch Paper Size	Two holes: A3, A4, A4R, A5 Three holes: A3, A4
Power Source	From the Finisher

Name	Puncher Unit-BG1 (Requires either the Staple Finisher-X1 or Booklet Finisher-X1) Two or Four Holes
Acceptable Punch Paper Weight	52 to 256 gsm
Acceptable Punch Paper Size	Two holes: A3, A4, A4R, A5, B5R Four holes: A3, A4
Power Source	From the Finisher

Name	Multi Function Professional Puncher-A1/B1 (Requires either the Staple Finisher-X1 or Booklet Finisher-X1)
Acceptable Punch Paper Weight	Bypass: 52 to 300 gsm Punch: 75 to 300 gsm
Acceptable Punch Paper Size	SRA3, A3, A4, A4R
Supported Punch Dies (Optional)	Loose Leaf (2- or 4-hole), Plastic Comb (21-hole), Velo Bind (12-hole), Twin Loop (23- or 34-hole), Colour Coil (47-hole)

Dimensions (W x D x H)	445 x 795 x 1,040 mm
Weight	Approx. 102 kg
Name	Document Insertion/Folding Unit-K1 (Requires either the Staple Finisher-V2 or Booklet Finisher-V2)
Number of trays	1

Tray Capacity	100 Sheets (80 gsm)
Supported Folding Type	Z-Fold, C-Fold
Acceptable Paper Type	Z-Fold/C-Fold: Thin, Plain, Colour, Recycled
Insertion Unit	Thin, Plain, Thick, Colour, Recycled, Textured, Bond, Coated, Tab, Letterhead
Acceptable Paper Sizes	Z-Fold: A3, A4R, B4 C-Fold: A4R Insertion Unit: SRA3, A3, A4, A4R, B4, B5, B5R
Acceptable Paper Weight	Z-Fold/C-Fold: 60 to 105 gsm Insertion Unit: 60 to 256 gsm
Power Requirements	100-240 V, 50/60Hz, 1.0 A
Dimensions (W x D x H)	247 x 679 x 1,242 mm (width: excluding document tray)
Weight	Approx. 76 kg
Name	Document Insertion Unit-Q1 (Requires either the Staple Finisher-V2 or Booklet Finisher-V2)
Number of trays	1
Tray Capacity	100 Sheets (80 gsm)
Acceptable Paper Weight	60 to 256 gsm
Acceptable Paper Type	Thin, Plain, Thick, Colour, Recycled, Textured, Bond, Coated, Tab, Letterhead
Acceptable Paper Sizes	SRA3, A3, A4, A4R, B4, B5, B5R
Power Requirements	100-240 V, 50/60Hz, 1.0 A
Dimension (W x D x H)	247 x 679 x 1,242 mm (attached to the device: width excluding document tray)
Weight	Approx. 40 kg
Name	Document Insertion Unit-N1 (Requires either the Staple Finisher-X1 or Booklet Finisher-X1)
Number of Trays	2
Tray Capacity	Upper / Lower Tray: 200 Sheets (80 gsm)
Acceptable Paper Type	Thin, Plain, Thick, Colour, Recycled, Pre-punched, Textured, Bond, Coated, Tab, Letterhead, Tracing
Acceptable Paper Sizes	SRA3, A3, A4, A4R, B4, B5, B5R, Custom size (182.0 x 182.0 mm to 330.2 x 487.7 mm)
Acceptable Paper Weight	52 to 300 gsm
Power Requirements	100-240 V, 50/60Hz, 1.0 A
Dimensions (W x D x H)	336 x 793 x 1,407 mm (width excluding document tray)
Weight	Approx. 61 kg
Name	Paper Folding Unit-J1 (Requires either the Staple Finisher-X1 or Booklet Finisher-X1)
Supported Folding Type	Z-Fold, Accordion Z-Fold, C-Fold, Half-Fold, Double Parallel Fold
Acceptable Paper Type	Thin, Plain, Colour, Recycled, Bond
Acceptable Paper Sizes	Z-Fold : A3, A4R, B4 Accordion Z-Fold, C-Fold, Half-Fold, Double Parallel Fold : A4R
Acceptable Paper Weight	Z-Fold, Accordion Z-Fold, C-Fold, Half-Fold : 52 to 105 gsm
Power Source	From the Finisher
Dimensions (W x D x H)	336 mm x 793 mm x 1,190 mm
Weight	Approx. 71 kg
Hardware Accessories	
Card Readers	MiCard Plus Proximity Card Reader, IC Card Reader Box-B1
Others	Tab Feeding Attachment Kit-F1, Utility Tray-B1
Security Options	
Document Security	Document Scan Lock Kit-B2, IR-ADV Security Kit-AD1 for IEEE 2600 Common Criteria Certification
Data Security	HDD Mirroring Kit-J1, 2.5 inch/250GB HDD-N1, 2.5 inch/1TB HDD-P1, Removable HDD Kit-AL1
System and Controller Options	
Print Accessories	PCL International Font Set-A1, PCL Asian Font Set-A1
Send Options	Universal Send Advanced Feature Set-H1 (Trace & Smooth PDF, Serchable PDF/XPS, OfficeOpen XML) Universal Send Digital User Signature Kit-C1
Barcode Printing	Barcode Printing Kit-D1
Efi-Fiery Based Controller	imagePASS-N2, colorPASS-GX500
Efi-Fiery Based Controller Options	Removable Hard Disk Drive Kit-B1, Fiery Impose, Fiery Compose, Fiery Impose and Compose
System Accessories	Copy Control Interface Kit-A1 Serial Interface Kit-K3 Connection Kit-A1 for Bluetooth LE NFC Kit-A1 (for Upright Control Panel) NFC Kit-C1
Fax Accessories	Super G3 Fax Board-AS1, Super G3 2nd Line Fax Board-AS1, Super G3 3rd/4th Line Fax Board-AS1, Remote Fax Kit-A1
Other Options	
Accessibility Accessories	ADF Access Handle-A1, Voice Guidance Kit-G1, Voice Operation Kit-D1
Consumables	Stamp Ink Cartridge-C1, Staple-N1, Staple-P1, Staple Cartridge-X1, Staple Cartridge-Y1

For information and services contact

Canon Australia Pty Ltd 1800 444 199 canon.com.au
 Canon New Zealand Ltd 0800 222 666 canon.co.nz

POWERED BY  **uniFLOW**
online
express

*No one does it
like you*

Canon